





Set of guide wheels

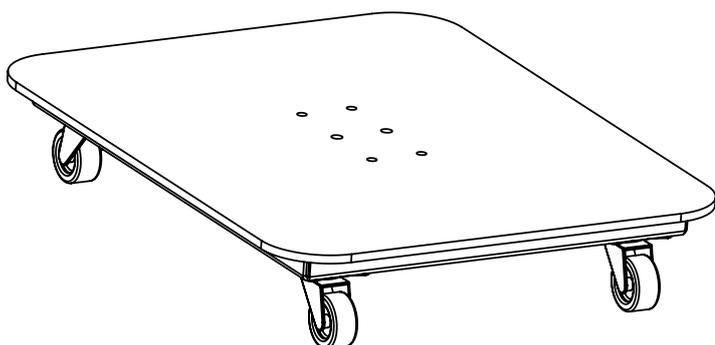

A set of guide wheels for the UV-C Sterilon FLOW range of luminaires. Thanks to the 360° rotation function, it significantly facilitates manoeuvring the luminaire. It enables easy and quick mounting.

The base is made of durable powder-coated steel sheet, which ensures many years of use.

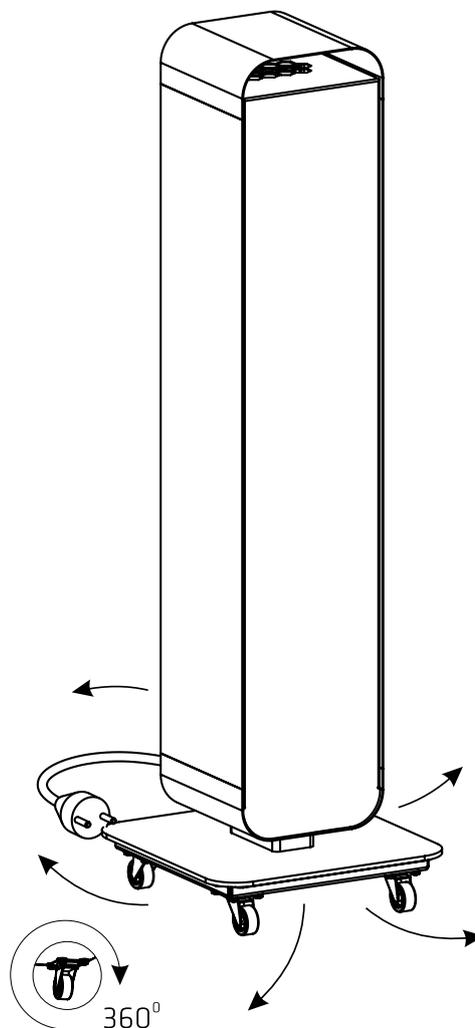


Available versions:

Index	Dimensions	Weight	Colour	UV-C STERILON FLOW 72W	UV-C STERILON FLOW 144W	UV-C STERILON FLOW 72W MONO
243646	230x230x53	2,5	Matt white	+	-	-
243660	290x230x53	3,0	White matt	-	+	-
243653	230x230x53	2,5	Gloss white	-	-	+


Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.



Wall bracket

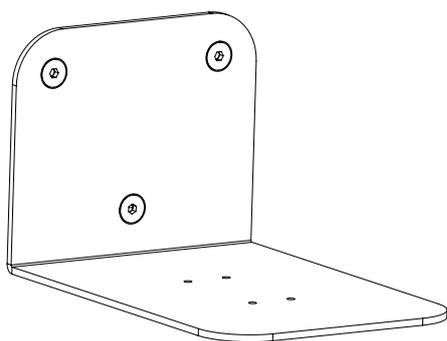

Wall bracket for mounting the UV-C Sterilon FLOW range of luminaires. Simple installation with included fixing screws.

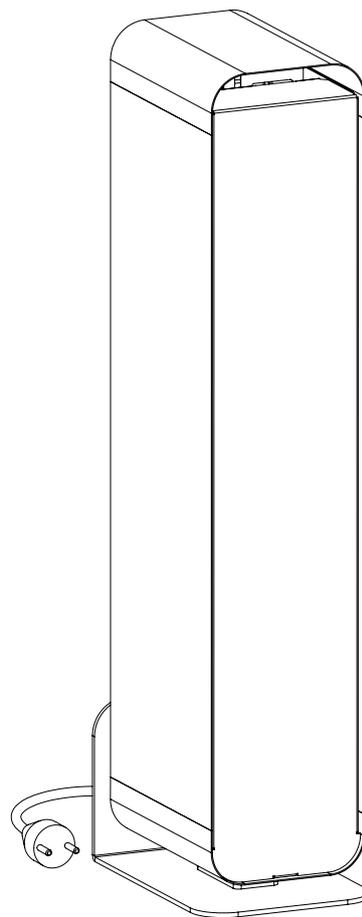


Available versions:

Index	Dimensions	Set	Colour	UV-C STERILON FLOW 72 W	UV-C STERILON FLOW 144 W	UV-C STERILON FLOW 72 W MONO
240485	225x140x160	1.3	Matt white	+	-	-
240492	225x220x160	1.75	Matt white	-	+	-
240478	225x140x160	1.3	Gloss white	-	-	+

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.




HEPA10 filters

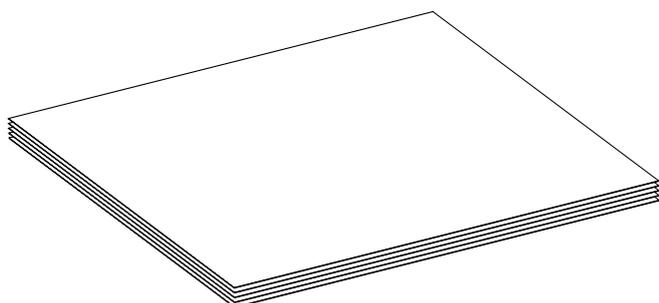

HEPA (High Efficiency Particulate Air) filters are highly efficient air filters. They are used as filters meeting very high requirements for air purity.

The offered filters are made of glass fibre. HEPA 10 class, set includes 5 pcs.

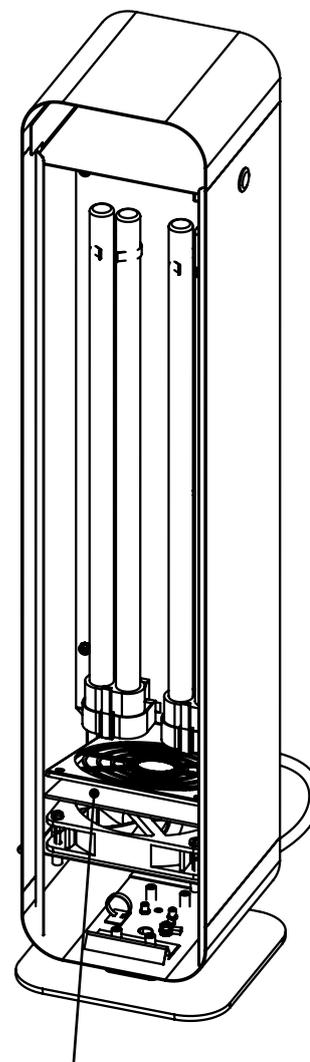

HEPA FILTER


Available versions:

Index	UV-C STERILON FLOW 72W	UV-C STERILON FLOW 144W	UV-C STERILON FLOW 72W MONO
243677	+	+	+

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.




Protection against opening

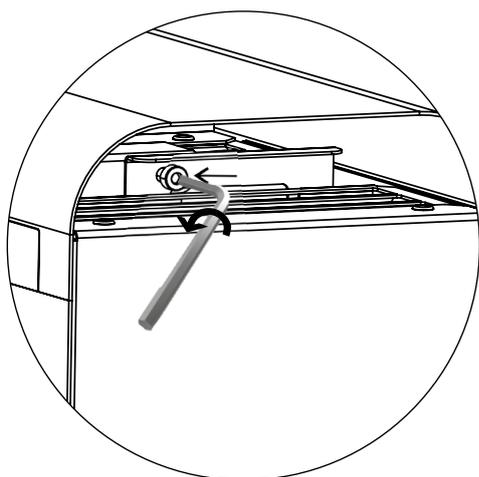

To ensure a higher degree of safety against exposure to UV-C radiation, we offer additional protection that prevents the luminaire cover from being opened.

It is a special socket screw available with the included wrench.

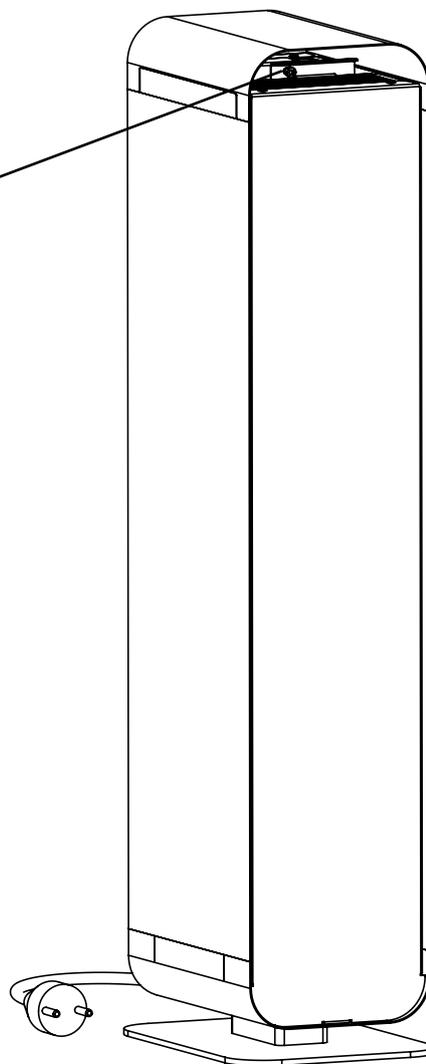


Available versions:

Index	UV-C STERILON FLOW 72W	UV-C STERILON FLOW 144W
240546	+	-
240553	-	+

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.




Operation time counter

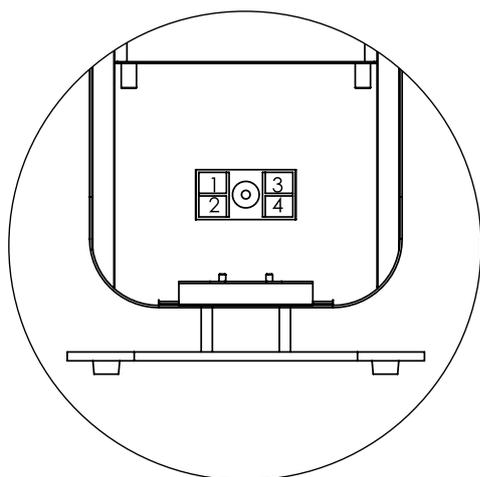

The operation time meter is used to indicate the consumption of UV-C fluorescent lamps.

Once the fluorescent lamps reach the programmed number of life span hours (9000), the lamps should be replaced

and the counter reset. Depending on the luminaire version, the sensor is mounted on the front or side of the device.

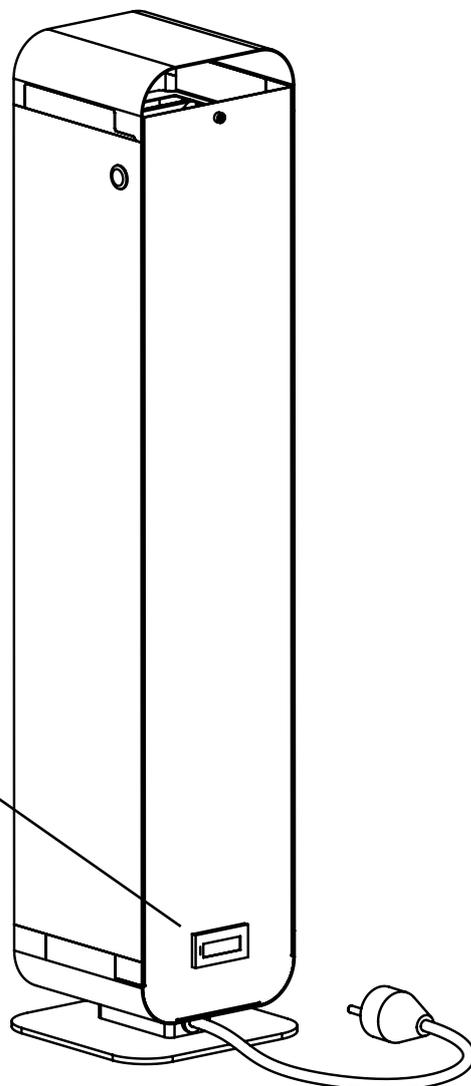

Available versions:

Index	UV-C STERILON FLOW 72W	UV-C STERILON FLOW 144W	UV-C STERILON FLOW 72W MONO
240522	+	-	-
240539	-	+	-
240515	-	-	+

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.



UV-C protective glasses



Robust and durable protective glasses. They filter 99.9% of UV radiation ranging from 0 to 380. The length can be adjusted in four positions for a better fit and comfort. The side wall of the lenses fully protects the eyesight.

- Material: polycarbonate (PC)
- Lenses with anti-scratch and anti-condensation coating
- Robust design prevents the glasses from being damaged when dropped
- Packaged in a convenient blister
- Holes for hanging a string over the neck



Available versions:

Indeks

243639 - UV-C PROTECTIVE GLASSES

Luminaire parameters are given with tolerance permitted by the standard. The manufacturer reserves the right to change the parameters of the product not for the worse, in the course of its improvement, and to make design changes or upgrade the product. Materials presented in the technical data sheet are not a commercial offer. The complete, current offer of Lena Lighting along with current parameters can be found on the manufacturer's website.